



**papiNet**

**DeliveryMessageWood**

**papiNet Standard - Version 2.31**

**Documentation**

**Global Standard for the Paper and Forest  
Products Supply Chain**

**Build V2R31\_20120413**

**Date 2012-04-13**

**Production Release**

# DeliveryMessageWood

## papiNet Standard - Version 2.31

---

### Copyright

Copyright 2000 - 2012 papiNet G.I.E ("papiNet") and International Digital Enterprise Alliance, Inc. ("IDEAlliance") collectively "Copyright Owner". All rights reserved by the Copyright Owner under the laws of the United States, Belgium, the European Economic Community, and all states, domestic and foreign. This document may be downloaded and copied provided that all copies retain and display the copyright and any other proprietary notices contained in this document. This document may not be sold, modified, edited, or taken out of context such that it creates a false or misleading statement or impression as to the purpose or use of the papiNet specification, which is an open standard. Use of this Standard, in accord with the foregoing limited permission, shall not create for the user any rights in or to the copyright, which rights are exclusively reserved to the Copyright Owner.

papiNet, IDEAlliance, and the members of all papiNet Groups (collectively and individually, "Presenters") make no representations or warranties, express or implied, including, but not limited to, warranties of merchantability, fitness for a particular purpose, title, or non-infringement. The presenters do not make any representation or warranty that the contents of this document are free from error, suitable for any purpose of any user, or that implementation of such contents will not infringe any third party patents, copyrights, trademarks or other rights. By making use of this document, the user assumes all risks and waives all claims against Presenters.

In no event shall Presenters be liable to user (or other person) for direct, indirect, special or consequential damages arising from or related to any use of this document, including, without limitation, lost profits, business interruption, loss of programs, or other data on your information handling system even if Presenters are expressly advised of the possibility of such damages.

---

### Use of Documents in papiNet Implementations

Documents may be used as templates for a papiNet implementation. The Presenters grant the right to modify and edit them to fit an actual implementation project provided all copies display the copyright and any other proprietary notices contained in this document. Such modified documents must not be distributed beyond the trading partners implementing or maintaining a papiNet connection.

# DeliveryMessageWood papiNet Standard - Version 2.31

---

---

## Table of Contents

|                                                   |    |
|---------------------------------------------------|----|
| Copyright .....                                   | 2  |
| Use of Documents in papiNet Implementations ..... | 2  |
| Table of Contents .....                           | 3  |
| DeliveryMessageWood Documentation.....            | 4  |
| DeliveryMessageWood e-Document Overview .....     | 4  |
| The Scope of the DeliveryMessageWood .....        | 4  |
| DeliveryMessageType [attribute] .....             | 5  |
| Business Rules for DeliveryMessageWood.....       | 5  |
| Processing the DeliveryMessageWood.....           | 7  |
| Understanding the Diagrams and Content .....      | 7  |
| DeliveryMessageWood Root Element .....            | 9  |
| DeliveryMessageWood.....                          | 9  |
| Primary Elements .....                            | 12 |
| DeliveryMessageWoodHeader .....                   | 12 |
| DeliveryMessageShipment .....                     | 14 |
| DeliveryMessageProductGroup.....                  | 15 |
| DeliveryShipmentLineItem .....                    | 16 |
| DeliveryMessageWoodSummary .....                  | 19 |
| DeliveryMessageWood Business Scenarios .....      | 21 |
| DeliveryMessageWood Scenario Listing .....        | 21 |
| Scenario A .....                                  | 21 |
| Scenario B .....                                  | 22 |
| Scenario C .....                                  | 23 |
| Scenario D .....                                  | 23 |
| Scenario E .....                                  | 24 |

# DeliveryMessageWood papiNet Standard - Version 2.31

---

## DeliveryMessageWood Documentation

---

### DeliveryMessageWood e-Document Overview

The DeliveryMessageWood e-Document enables the sender to describe the contents and configuration of a shipment at various levels of detail.

The DeliveryMessageWood e-Document specifies the details of a delivery that is either being despatched or will be despatched at a later time. The attribute DeliveryMessageType controls the usage of the DeliveryMessageWood. A seller can send a DeliveryMessageWood to one or more receivers, including the ship-to and/or buyer parties. Delivery messages are also sent to and from logistics partners.

The DeliveryMessageWood can be used as a response to call cff, delivery instruction and loading instruction when a delivery from a warehouse is requested. A DeliveryMessageWood e-Document fulfils the same or similar role as a delivery note, manifest, weigh list, tally sheet, advanced shipping notice, loading order, or packing specification.

---

### The Scope of the DeliveryMessageWood

The DeliveryMessageWood can include:

- The date on which goods were despatched or will be ready for despatch.
- Consignment details for example, order, package identifiers, and volumes.
- Tracking details (such as the route of delivery).

Using this information, the seller can:

- Make the transport booking
- Send a confirmation for a customers call off
- Can be used for transport booking.
- Create a delivery plan

It is also used as an internal work order for the shipment department.

Using this information, the buyer can:

- Prepare for receipt of goods.
- Reconcile the physically delivered goods with those contained in the delivery message.
- Reconcile the list of delivered goods with the invoice for those goods.

Using this information, the seller/buyer can:


- Begin the customs clearance process, in the case of international consignments.
- A delivery message cannot be used to return goods to the seller.

# DeliveryMessageWood

## papiNet Standard - Version 2.31

### DeliveryMessageType [attribute]

DeliveryMessageType defines the type of DeliveryMessageWood.



*This item is restricted to the following list.*

#### DeliveryMessage

A delivery message type that contains optional routing information, quantities at the DeliveryMessageLineItem level, and details at the DeliveryMessageLineItemDetail level. The seller uses a DeliveryMessage to provide delivery details to the ship-to party and tracking information.

#### InitialShipmentAdvice

A delivery message type that contains detailed routing information, quantities at the DeliveryMessageLineItem level and optionally details at the DeliveryMessageLineItemDetail level. The seller uses the InitialShipmentAdvice to provide preliminary notification of shipment routing and quantities (can be used as an advanced notice of delivery). The quantities indicated may not necessarily be delivered—for example, if there is damage in transit or the delivery is rerouted to another destination.

#### LoadingOrder

Specifies delivery schedule, the transport booking requirements and shipping instructions, as well as the internal work order for the shipment

#### PackingSpecification

A Packing Specification is a business transaction specifying the complete consignment being shipped from a consignor to a consignee. The specification describes in detail what is being shipped and how it is packed and marked.

#### ShipmentAdvice

A delivery message type that contains a specification of goods, that are dispatched and will be delivered to a warehouse. A ShipmentAdvice can refer to a Delivery Instruction Sequence or a CallOff, but is normally also used for notifying a receiving warehouse operator of shipments to the warehouse.

### Business Rules for DeliveryMessageWood

The following table lists the business rules that apply to all delivery message types.

#### General Business Rules for DeliveryMessageWood

| Identifier | Business Rule                                                                                                                |
|------------|------------------------------------------------------------------------------------------------------------------------------|
| DEL001     | There are four types of delivery messages: Loading Order, Package Specification, DeliveryMessage, and InitialShipmentAdvice. |
| DEL002     | One or more DeliveryLeg(s) specify the delivery route.                                                                       |
| DEL003     | Each DeliveryLeg may include transport information                                                                           |

## DeliveryMessageWood papiNet Standard - Version 2.31

| Identifier    | Business Rule                                                                                                                                                                    |
|---------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|               | that details the mode, vehicle, unit, and loading information.                                                                                                                   |
| <b>DEL004</b> | A DeliveryMessage contains a reference to one or more Order(s) and one or more PurchaseOrderLineItem(s) of those Order(s).                                                       |
| <b>DEL005</b> | [obsolete]                                                                                                                                                                       |
| <b>DEL006</b> | A DeliveryMessage contains one or more DeliveryMessageLineItem(s) ordered by DeliveryMessageLineItemNumber.                                                                      |
| <b>DEL007</b> | Each DeliveryMessageLineItem refers to only one PurchaseOrderLineItem from one Order.                                                                                            |
| <b>DEL008</b> | In the case of a mixed pallet with multiple products from different PurchaseOrderLineItem(s), the same pallet identifier can be included in multiple DeliveryMessageLineItem(s). |
| <b>DEL009</b> | Each DeliveryMessageLineItem can contain one or more PackageInformation elements.                                                                                                |
| <b>DEL010</b> | PackageInformation enumerates delivered physical items.                                                                                                                          |
| <b>DEL011</b> | See following tables for different e-Document types.                                                                                                                             |
| <b>DEL012</b> | PackageInformation is a hierarchy that represents package details. Each level has an identifier field used to specify the package.                                               |
| <b>DEL013</b> | Delivery messages must be processed in ascending date time order using DeliveryMessageDate to ensure the correct processing of replacements and/or cancellations.                |
| <b>DEL014</b> | If the seller sets the DeliveryMessageStatusType attribute to Replaced or Cancelled, the OriginalDeliveryNumber must be present in DeliveryMessageReference.                     |

### General Business Rules for DeliveryMessageWood, DeliveryMessageType = DeliveryMessage

| Identifier     | Business Rule                                         |
|----------------|-------------------------------------------------------|
| <b>DEL011a</b> | PackageInformation is required for a DeliveryMessage. |

# DeliveryMessageWood

## papiNet Standard - Version 2.31

---

### General Business Rules for DeliveryMessageWood, DeliveryMessageType = InitialShipmentAdvice

| Identifier | Business Rule                                                |
|------------|--------------------------------------------------------------|
| DEL011b    | PackageInformation is optional for an InitialShipmentAdvice. |

---

### Processing the DeliveryMessageWood

E-Document processing depends on the e-Document type and on the value in the status field at the e-Document header level. All the delivery message types have only one status field-DeliveryMessageStatusType at the e-Document level. Seller or a representative of the seller is the only party that sends a DeliveryMessageWood. The e-Document can be sent with one of three values in the DeliveryMessageStatusType field.

A Packing Specification is a business transaction specifying the complete consignment being shipped from a consignor to a consignee. The specification describes in detail what is being shipped and how it is packed and marked.

### Status Values Used When Processing the DeliveryMessageWood

The following statuses are valid for the DeliveryMessagwWood (@DeliveryMessageStatusType)

- Original - The supplied information is the first version of that information.
- Cancelled - Indicates that the seller wants to cancel the e-Document
  - Per business rule DEL014, the seller must reference the OriginalDeliveryNumber of the original e-Document if the delivery message's DeliveryMessageStatusType is set to Cancelled.
- Replaced - Indicates that the seller wants to replace the e-Document.
  - Per business rule DEL014, the seller must reference the OriginalDeliveryNumber of the original e-Document if the delivery message's DeliveryMessageStatusType is set to Replaced.

---

### Understanding the Diagrams and Content

This section provides a graphical view of the schema structures, a discussion of the item's children. You can find additional information about papiNet and the standard at [www.papiNet.org](http://www.papiNet.org).

The graphics contain content model indicators, cardinality indicators, and data type information.

Associated with each graphic are the definitions for the parent item and any associated child items. All attributes are listed first, followed by the elements.

The following information should help you interpret and understand this standard. Please note the following:

- Content Model and Cardinality operate together to determine if the element or attribute are required in the instance document.
- The same attribute can never appear multiple times in the same element so, you will never see a multiple cardinality indicator.

# DeliveryMessageWood

## papiNet Standard - Version 2.31

---

### Content model indicators:

There are three possible types of content: "sequence", "choice", and "all". The papiNet standard currently does not use the "all" construct.

- (sequence)

The sequence of the items to the right of the graphic (or below the text) is required.

- (choice)

A choice of the items to the right of the graphic (or below the text) is permitted.

- (all)

All the items to the right of the graphic are required.

### Cardinality indicators:

- Dotted line around element or attribute.

A single instance of the item can optionally exist.

- Dotted line around item with range indicated below.

Multiple instances of the item can optionally exist.

- Solid line around item.

A single instance of the item must exist.

- Solid line around item with range indicated below

At least one instance must exist; multiple instances can optionally exist.

### Datatype indication:

When a data type is assigned to an element (either a simple type or complex type) the name of the data type is presented beneath the item name in the graphic.

- In some cases additional information about the data type is presented (the default value).

Elements can either have content that is textual/numeric in nature or content that is made up of additional elements and/or attributes.

- When the content is textual/numeric in nature "three straight horizontal lines" will appear in the upper left-hand corner of the graphic. Pay attention to these elements because they are where you will be entering your information.
- When the content is made up of additional elements and/or attributes a "gray-box" will appear on the right-hand side of the graphic.
- If the graphic shows both the horizontal lines and the gray-box then, in the papiNet standard, the content below the element are attributes.



# DeliveryMessageWood

## papiNet Standard - Version 2.31


### DeliveryMessageWood Root Element

#### DeliveryMessageWood

The DeliveryMessageWood element is the root element for the DeliveryMessageWood e-Document.

The DeliveryMessageWood e-Document enables the sender to describe the contents and configuration of a shipment at various levels of detail.

**DeliveryMessageWood**

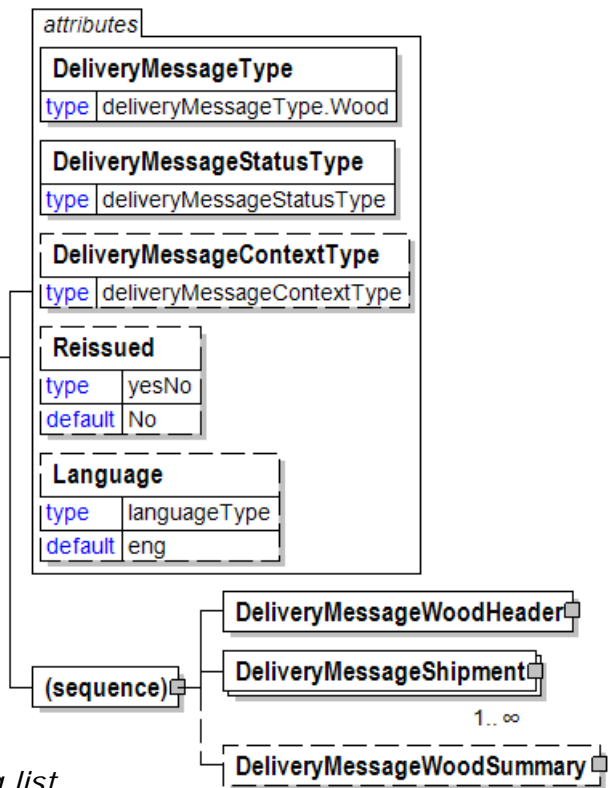

#### DeliveryMessageType [attribute]

*DeliveryMessageType is mandatory. A single instance is required.*

DeliveryMessageType defines the type of DeliveryMessageWood.

*This item is restricted to the following list.*

#### DeliveryMessage

A delivery message type that contains optional routing information, quantities at the DeliveryMessageLineItem level, and details at the DeliveryMessageLineItemDetail level. The seller uses a DeliveryMessage to provide delivery details to the ship-to party and tracking information.

#### InitialShipmentAdvice

A delivery message type that contains detailed routing information, quantities at the DeliveryMessageLineItem level and optionally details at the DeliveryMessageLineItemDetail level. The seller uses the InitialShipmentAdvice to provide preliminary notification of shipment routing and quantities (can be used as an advanced notice of delivery). The quantities indicated may not necessarily be delivered—for example, if there is damage in transit or the delivery is rerouted to another destination.

#### LoadingOrder

Specifies delivery schedule, the transport booking requirements and shipping instructions, as well as the internal work order for the shipment

#### PackingSpecification

A Packing Specification is a business transaction specifying the complete consignment being shipped from a consignor to a consignee. The specification describes in detail what is being shipped and how it is packed and marked.

#### ShipmentAdvice

A delivery message type that contains a specification of goods, that are dispatched and will be delivered to a warehouse. A ShipmentAdvice can refer to a Delivery Instruction Sequence or a CallOff, but is normally also used for notifying a receiving

# DeliveryMessageWood

## papiNet Standard - Version 2.31

---

warehouse operator of shipments to the warehouse.

### **DeliveryMessageStatusType [attribute]**

*DeliveryMessageStatusType is mandatory. A single instance is required.*

Identifies the status of the entire DeliveryMessage (in other words, at the root level).

*This item is restricted to the following list.*

#### **Cancelled**

The supplied information has been cancelled. Items that have been cancelled are not included in totals on the summary levels of the e-document.

#### **Original**

The supplied information is the first version of that information.

#### **Replaced**

The supplied information is replacing earlier supplied information. The receiver should revalidate the information in their system based upon the entire information received.

### **DeliveryMessageContextType [attribute]**

*DeliveryMessageContextType is optional. A single instance might exist.*

Communicates the reason for this delivery. If not present then this is a standard, typical delivery.

*This item is restricted to the following list.*

#### **Return**

The delivery supports the goods return process.

### **Reissued [attribute]**

*Reissued is optional. A single instance might exist.*

Either "Yes" or "No".

*This item is restricted to the following list.*

#### **Yes**

#### **No**

### **Language [attribute]**

*Language is optional. A single instance might exist.*

XML has embraced 2 and 3 digit language codes through the application of an addendum to the standard.

Information on the content of this attribute is available

at: <http://www.loc.gov/standards/iso639-2/> this is the official site of the ISO 639-2 Registration Authority.

- <http://www.w3.org/International/O-HTML-tags.html> provides an explanation of the errata updating XML.
- <http://www.ietf.org/rfc/rfc3066.txt> is the key document that is referenced in the above errata.

### **(sequence)**

*The sequence of items below is mandatory. A single instance is required.*

# DeliveryMessageWood

## papiNet Standard - Version 2.31

---

### **DeliveryMessageWoodHeader**

*DeliveryMessageWoodHeader is mandatory. A single instance is required.*

This element contains the information that is consistent for the entire DeliveryMessageWood document.

- Note: DocumentReferenceInformation will be removed from this element in the next version of papiNet. Use the DocumentInformation element instead.

### **DeliveryMessageShipment**

*DeliveryMessageShipment is mandatory. One instance is required, multiple instances might exist.*

The DeliveryMessageShipment specifies an individual delivery shipment. It may contain product grouping within the shipment.

### **DeliveryMessageWoodSummary**

*DeliveryMessageWoodSummary is optional. A single instance might exist.*

The DeliveryMessageWoodSummary contains summary information based on the line items contained in the DeliveryMessageWood document.

# DeliveryMessageWood

## papiNet Standard - Version 2.31

### Primary Elements

#### DeliveryMessageWoodHeader

This element contains the information that is consistent for the entire DeliveryMessageWood document.

- Note: DocumentReferenceInformation will be removed from this element in the next version of papiNet. Use the DocumentInformation element instead.

**(sequence)**

*The contents of (sequence) are mandatory. A single instance is required.*

##### DeliveryMessageNumber

*DeliveryMessageNumber is mandatory. A single instance is required.*

A unique delivery identifier assigned to each DeliveryMessage as agreed between the trading partners.

##### TransactionHistoryNumber

*TransactionHistoryNumber is optional. A single instance might exist.*

A sequential number that keeps track of the version of a document being sent by the document originator except in the case where TransactionHistoryConfirmation is used, in which case the TransactionHistoryNumber refers to the trigger transaction for which the confirmation is being sent.

##### DeliveryMessageDate

*DeliveryMessageDate is mandatory. A single instance is required.*

The Date and Time when the DeliveryMessage was issued.



##### DeliveryMessageReference

*DeliveryMessageReference is optional. Multiple instances might exist.*

An element that identifies the relevant references pertaining to the DeliveryMessage, identified by DeliveryMessageReferenceType.

##### DocumentReferenceInformation

*DocumentReferenceInformation is optional. Multiple instances might exist.*

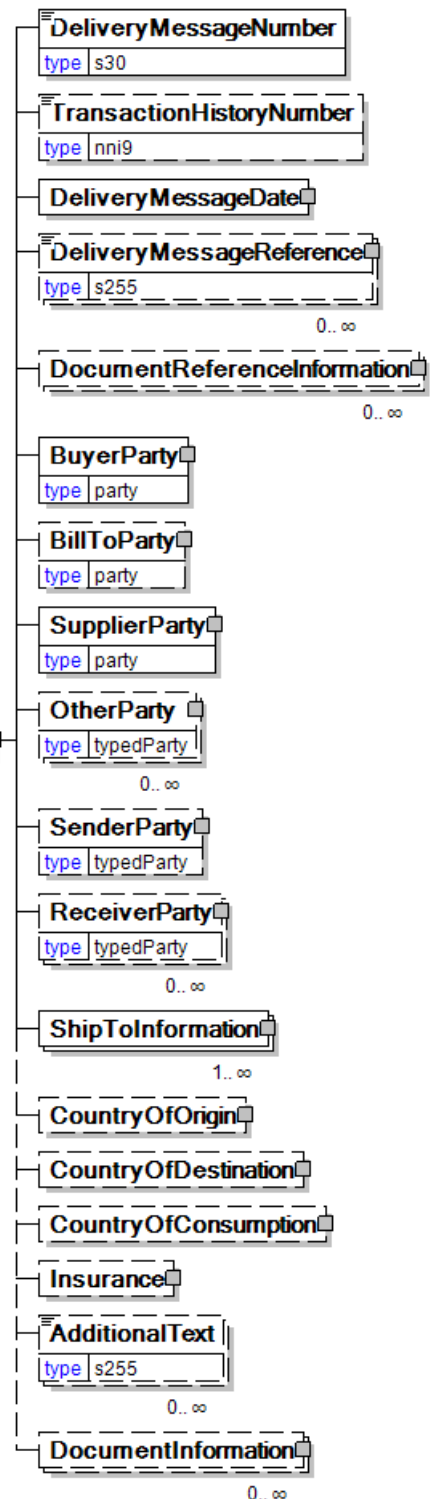

# DeliveryMessageWood

## papiNet Standard - Version 2.31

---

A group item containing reference information applicable to a document.

### **BuyerParty**

*BuyerParty is mandatory. A single instance is required.*

The legal entity to which the product is sold. Also commonly referred to as the sold-to party or customer. If no OtherParty is defined as the Payer, the Buyer is the Payer.

### **BillToParty**

*BillToParty is optional. A single instance might exist.*

The address where the invoice is to be sent.

### **SupplierParty**

*SupplierParty is mandatory. A single instance is required.*

The organisation or business entity responsible for providing the product. SupplierParty is also the seller of the product, if Seller is not specified as OtherParty = Seller.

### **OtherParty**

*OtherParty is optional. Multiple instances might exist.*

An organisation or business entity other than those specifically detailed within a business document.

### **SenderParty**

*SenderParty is optional. A single instance might exist.*

The business entity issuing the business document, the source of the document.

- This is the same entity as the "From" party in the ebXML message service envelope. The entity responsible for the content. If the sender party has outsourced the transmission function to a third party the sender party is the original party not the party performing the transmission service.

### **ReceiverParty**

*ReceiverParty is optional. Multiple instances might exist.*

The business entity for whom the business document is intended, the destination of the document.

- This is the same entity as the "To" party in the ebXML message service envelop. The entity interested in the content. If the receiver party has outsourced the message receipt function to a third party the receiver party is the intended party not the party performing the receiving process.

### **ShipToInformation**

*ShipToInformation is mandatory. One instance is required, multiple instances might exist.*

Group element containing information about the ship to and delivery of a product.

### **CountryOfOrigin**

*CountryOfOrigin is optional. A single instance might exist.*

The country of origin for the material.

### **CountryOfDestination**

*CountryOfDestination is optional. A single instance might exist.*

The country where the goods will be, or were, shipped to.

### **CountryOfConsumption**

# DeliveryMessageWood

## papiNet Standard - Version 2.31

---

*CountryOfConsumption is optional. A single instance might exist.*

The country of consumption for the material.

### Insurance

*Insurance is optional. A single instance might exist.*

Group element containing information about insurance

### AdditionalText

*AdditionalText is optional. Multiple instances might exist.*

A text field that is used to communicate information not previously defined or for special instructions. To be used only for circumstances not covered by specific elements.

### DocumentInformation


*DocumentInformation is optional. Multiple instances might exist.*

A group element containing a specification of required documents in the business process. Additional free text to be printed on documents can also be specified.

---

## DeliveryMessageShipment

The DeliveryMessageShipment specifies an individual delivery shipment. It may contain product grouping within the shipment.

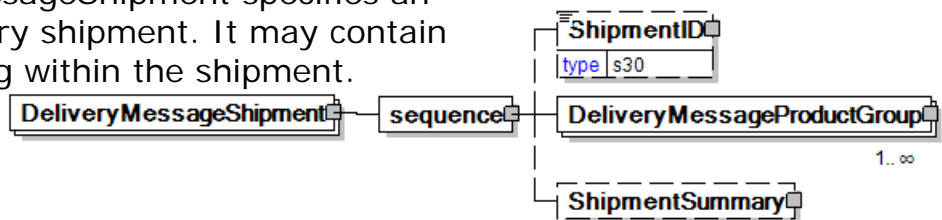

### (sequence)

*The contents of (sequence) are mandatory. A single instance is required.*

### ShipmentID

*ShipmentID is optional. A single instance might exist.*

The ShipmentID may be a Bill of Lading Marking, which is customer's reference mark on each package used for logistic purposes. Should not be mixed up with Bill of Lading number. Another example of ShipmentID is grouping by a ContainerID.

### DeliveryMessageProductGroup

*DeliveryMessageProductGroup is mandatory. One instance is required, multiple instances might exist.*

The DeliveryMessageProductGroup permits the organization of a shipment by a product grouping.

### ShipmentSummary

*ShipmentSummary is optional. A single instance might exist.*

Summery information for an entire shipment

# DeliveryMessageWood

## papiNet Standard - Version 2.31

---

### DeliveryMessageProductGroup


The DeliveryMessageProductGroup permits the organization of a shipment by a product grouping.

(sequence)

*The*

*sequence of*

*items below is mandatory. A single instance is required.*

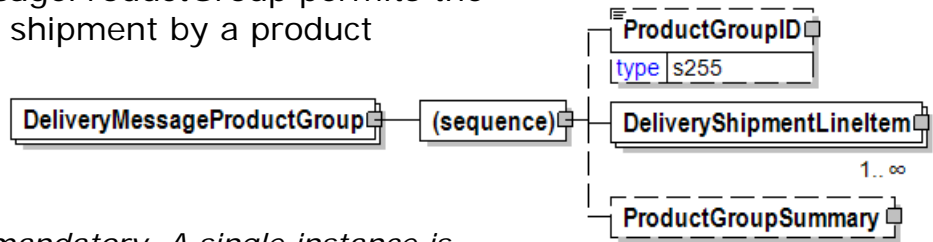

#### ProductGroupID

*ProductGroupID is optional. A single instance might exist.*

Possibility to group packages or Shipments. Example: Creating temporary group ID's for logistic reasons or lot number.

#### DeliveryShipmentLineItem

*DeliveryShipmentLineItem is mandatory. One instance is required, multiple instances might exist.*

The DeliveryShipmentLineItem specifies an individual delivery line for one order and order line item.

- PackageInformation will be deprecated in the version following V2R30, it has been replaced with TransportPackageInformation.
- You are encouraged to use TransportPackageInformation.

#### ProductGroupSummary

*ProductGroupSummary is optional. A single instance might exist.*

Group of elements to provide summary information on product level.

# DeliveryMessageWood

## papiNet Standard - Version 2.31

### DeliveryShipmentLineItem

The DeliveryShipmentLineItem specifies an individual delivery line for one order and order line item.

- PackageInformation will be deprecated in the version following V2R30, it has been replaced with TransportPackageInformation.
- You are encouraged to use TransportPackageInformation.

#### (sequence)

*The sequence of items below is mandatory. A single instance is required.*

#### DeliveryShipmentLineItemNumber

*DeliveryShipmentLineItemNumber is mandatory. A single instance is required.*

Sequential number to identify individual line items within a shipment

#### PurchaseOrderInformation

*PurchaseOrderInformation is optional. A single instance might exist.*

A group item containing information unique to this purchase order, which is provided by the buyer. PurchaseOrderInformation can be optional in the supply chain. Invoices are created without having a Purchase Order in Vendor Managed Inventory. Freight invoices also will not have a Purchase Order number.

#### PurchaseOrderLineItemNumber

*PurchaseOrderLineItemNumber is optional. A single instance might exist.*

The sequential number that uniquely identifies the purchase order line item.

#### DeliveryMessageReference



*DeliveryMessageReference is optional. Multiple instances might exist.*

An element that identifies the relevant references pertaining to the DeliveryMessage, identified by DeliveryMessageReferenceType.

#### DocumentReferenceInformation

*DocumentReferenceInformation is optional. Multiple instances might exist.*

A group item containing reference information applicable to a document.

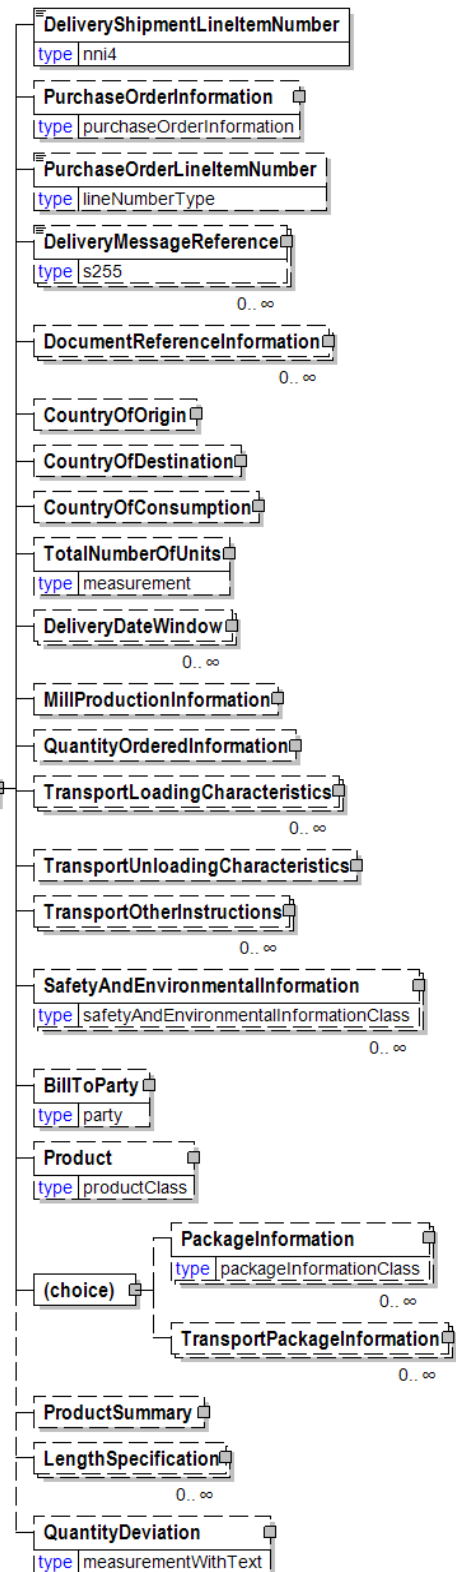



# DeliveryMessageWood

## papiNet Standard - Version 2.31

---

### **CountryOfOrigin**

*CountryOfOrigin is optional. A single instance might exist.*

The country of origin for the material.

### **CountryOfDestination**

*CountryOfDestination is optional. A single instance might exist.*

The country where the goods will be, or were, shipped to.

### **CountryOfConsumption**

*CountryOfConsumption is optional. A single instance might exist.*

The country of consumption for the material.

### **TotalNumberOfUnits**

*TotalNumberOfUnits is optional. A single instance might exist.*

The total number of units.

### **DeliveryDateWindow**

*DeliveryDateWindow is optional. Multiple instances might exist.*

A group item defining the date/time interval for delivery to take place. An element which may contain the estimated date for which delivery is expected. This date is not absolute.

### **MillProductionInformation**

*MillProductionInformation is optional. A single instance might exist.*

A grouping element that contains information about production at the mill.

### **QuantityOrderedInformation**

*QuantityOrderedInformation is optional. A single instance might exist.*

Used to identify quantity. The construct provides via InformationalQuantity the ability to provide the Quantity in another UOM. Length is also provided to further specify the quantity.

### **TransportLoadingCharacteristics**

*TransportLoadingCharacteristics is optional. Multiple instances might exist.*

A group item defining how the transported items are to be loaded.

### **TransportUnloadingCharacteristics**

*TransportUnloadingCharacteristics is optional. A single instance might exist.*

A group item defining how the transported items are to be unloaded.

### **TransportOtherInstructions**

*TransportOtherInstructions is optional. Multiple instances might exist.*

A group item defining any other instructions for the transport not covered in the description of transport mode, vehicle, unit, and loading characteristics or defining an alternative description for the categories mentioned above.

### **SafetyAndEnvironmentalInformation**

*SafetyAndEnvironmentalInformation is optional. Multiple instances might exist.*

Name of certification type, if any, on the goods (For example, FSC, PEFC). SafetyAndEnvironmental needs a value or measurement to communicate the percentage of the product is certified (for example, 75% is certified by the

# DeliveryMessageWood

## papiNet Standard - Version 2.31

---

indicated agency).

### **BillToParty**

*BillToParty is optional. A single instance might exist.*

The address where the invoice is to be sent.

### **Product**

*Product is optional. A single instance might exist.*

Product is a group item defining the article and its characteristics. Product is used to specify product characteristics organized by ProductIdentifier, ProductDescription, and Classification. Book Manufacturing, Label Stock, Paper, Pulp, Recovered Paper, Wood Products, and Virgin Fibre market segments have defined their product characteristics and conversion features for implementation in papiNet.

### **(choice)**

*[choice] is optional because of choice construct.*

#### **PackageInformation**

*PackageInformation is optional because of choice construct.*

The purpose of the PackageInformation structure is to clearly identify physical handling items that constitute the delivery.

PackageInformation is the highest level of product packaging it describes the shipping or warehousing unit.

- If you are communicating a package, usually for logistics or transport purposes, you should include the PackageType, Identifier, ItemCount, and Quantity. (Note: you still have the ability to describe the item with one of the "named" items.)
- If you are communicating one of the named Items there is no need to include PackageType, Identifier, ItemCount, and Quantity.

Since either of these two approaches can be used the entire contents of this element are optional even though the parent may be required. It is expected that you will fill in the appropriate details.

#### **TransportPackageInformation**

*TransportPackageInformation is optional because of choice construct.*

Information of a package used in transportation, can include several normal packages.

### **ProductSummary**

*ProductSummary is optional. A single instance might exist.*

Group of elements to provide summary information on product level.

### **LengthSpecification**

*LengthSpecification is optional. Multiple instances might exist.*

Length specification of the wood product.

### **QuantityDeviation**

*QuantityDeviation is optional. A single instance might exist.*

To be deprecated in a future version. Use the Quantity element with a QuantityContext of "Deviation".

# DeliveryMessageWood

## papiNet Standard - Version 2.31


### DeliveryMessageWoodSummary

The DeliveryMessageWoodSummary contains summary information based on the line items contained in the DeliveryMessageWood document.

**(sequence)**

*The contents of (sequence) are mandatory. A single instance is required.*

**TotalNumberOfShipments**



*TotalNumberOfShipments is mandatory. A single instance is required.*

Total number of shipments referred to in a delivery message.

**(sequence)**

*The contents of (sequence) are optional. Multiple instances might exist.*

**TotalQuantity**

*TotalQuantity is mandatory. A single instance is required.*

The total quantity of similar items in the business document. TotalQuantity is primarily used in the summary section of documents where it is repeatable to permit totaling for different units of measure.

**TotalInformationalQuantity**

*TotalInformationalQuantity is optional. Multiple instances might exist.*

A quantity that is used to communicate related information about the parent element. This element represents a total that is derived from individual line items.

**ProductSummary**

*ProductSummary is optional. A single instance might exist.*

Group of elements to provide summary information on product level.

**LengthSpecification**

*LengthSpecification is optional. Multiple instances might exist.*


Length specification of the wood product.

**QuantityDeviation**

*QuantityDeviation is optional. A single instance might exist.*

Used to identify the deviation quantity accepted for this product.

Quantity deviation is partly an ancient/traditional thing in timber trade and refers more to sea transport than others. Quantity deviation can concern both line level quantities and total quantities. Total quantity deviation is meant to really restrict volumes to exceed ship's capacity.

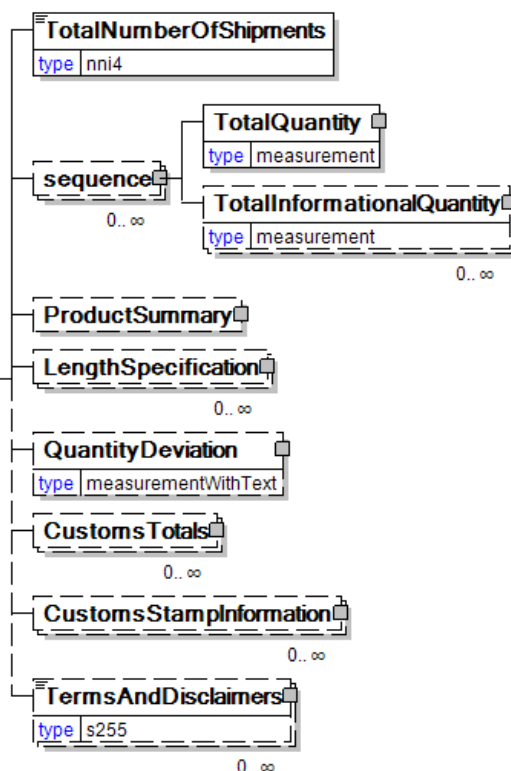

# DeliveryMessageWood

## papiNet Standard - Version 2.31

---

Example Quantity deviations used for total quantities are:

- CA./Max: for example, CA./max 1000 M3 = maximum quantity 1000 m3, but can be -10 % less (so 900 - 1000 m3 in this case)
- Min but Max: for example, min 45 max 50 m3 = volume to be between 45 and 50
- Min/Max: for example, min/max 500 m3 = have to be roughly accurate 500 m3
- CA: for example, CA 500 m3 = +/-10 % (450 - 550 m3)

In some contracts, at the line level, it is said that product level variation can be +/-10% (at the same time we can have deviation for total quantity)

- For example: You can have +/-10 % volumes in line levels but total quantity must meet the following requirement - Min/Max 1000 m3.

### **CustomsTotals**

*CustomsTotals is optional. Multiple instances might exist.*

A grouping element for customs total information.

### **CustomsStampInformation**

*CustomsStampInformation is optional. Multiple instances might exist.*

A grouping element that organises the information for customs.

### **TermsAndDisclaimers**

*TermsAndDisclaimers is optional. Multiple instances might exist.*

An element that contains legal information with an indication of what the Language is.

# DeliveryMessageWood papiNet Standard - Version 2.31

## DeliveryMessageWood Business Scenarios

### DeliveryMessageWood Scenario Listing

These use cases includes delivery messages sent to communicate deliveries made to a terminal and as deliveries are made to a final Ship-To location. They should be used to get familiar with how XML is mapped from existing documents and where XML documents fit in the processing flow. Business Use Cases are given which contain common business examples and guidelines to formatting the XML.

|                   |                                                                                                                  |
|-------------------|------------------------------------------------------------------------------------------------------------------|
| <b>Scenario A</b> | A DeliveryMessageWood is sent that specifies shipment instructions to forwarder and internal shipping department |
| <b>Scenario B</b> | A DeliveryMessageWood is sent that specifies transport booking information to the carrier.                       |
| <b>Scenario C</b> | A DeliveryMessageWood is sent that specifies shipping information to the buyer.                                  |
| <b>Scenario D</b> | A DeliveryMessageWood as a Package Specification.                                                                |
| <b>Scenario E</b> | A DeliveryMessageWood is sent that specifies multiple delivery legs.                                             |
| <b>Scenario F</b> | A DeliveryMessageWood of type "InitialShipmentAdvice" is sent to the Buyer that does not include delivery items. |
| <b>Scenario G</b> | A DeliveryMessageWood is sent that corrects an erroneous DeliveryMessage.                                        |
| <b>Scenario H</b> | A DeliveryMessageWood is sent that cancels an erroneous DeliveryMessageWood.                                     |

### Scenario A

|                   |                                                                                                                   |
|-------------------|-------------------------------------------------------------------------------------------------------------------|
| <b>e-Document</b> | DeliveryMessageWood                                                                                               |
| <b>Type</b>       | LoadingOrder                                                                                                      |
| <b>Scenario</b>   | A DeliveryMessageWood is sent that specifies shipment instructions to forwarder and internal shipping department. |
| <b>Outcome</b>    | Delivery is recorded as planned shipment to forwarders system                                                     |
| <b>Initiator</b>  | Supplier                                                                                                          |
| <b>Receiver</b>   | Forwarder, internal shipping department                                                                           |

## DeliveryMessageWood papiNet Standard - Version 2.31

|                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Trigger</b> | Call Off or Delivery Plan                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Step 1.</b> | <p>Supplier sends a DeliveryMessageWood that corresponds to one PurchaseOrderInformation, PurchaseOrderLineItemNumber combination. Each PackageInformation specifies either the Packages or the total volume for products that are planned to be sent</p> <ul style="list-style-type: none"> <li>• PackageInformation can occur multiple times.</li> <li>• Identifier is the Identifier used to distinguish the Package</li> <li>• ItemCount is the count of the number of Pieces in the Package Quantity contains the Actual Volume of the Product or Packages, InformationalQuantity with QuantityType="Volume" specifies the Nominal volume of Product</li> </ul> <p>Statuses sent within the e-Document:</p> <ul style="list-style-type: none"> <li>• DeliveryMessageStatusType = "Original"</li> </ul> |

### Scenario B

|                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|-------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>e-Document</b> | DeliveryMessageWood                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Type</b>       | LoadingOrder                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Scenario</b>   | A DeliveryMessageWood is sent that specifies planned volumes                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Outcome</b>    | Delivery is recorded as planned shipment in the Carriers system                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Initiator</b>  | Supplier                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Receiver</b>   | Carrier                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Trigger</b>    | Goods are ready for Delivery                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>Step 1.</b>    | <p>Supplier sends a DeliveryMessageWood that corresponds to one PurchaseOrderInformation, PurchaseOrderLineItemNumber combination. PackageInformation can occur multiple times.</p> <ul style="list-style-type: none"> <li>• Identifier is used to distinguish the package</li> <li>• ItemCount is the count of the number of Pieces in the Package</li> <li>• Quantity contains the Volume of the products or the number of packages</li> <li>• InformationalQuantity with</li> </ul> |

## DeliveryMessageWood papiNet Standard - Version 2.31

|  |                                                                                                                                                                                                             |
|--|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | <p>QuantityType="Volume" specifies the Nominal volume of Product</p> <p>Statuses sent within the e-Document:</p> <ul style="list-style-type: none"> <li>• DeliveryMessageStatusType = "Original"</li> </ul> |
|--|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

### Scenario C

|                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>e-Document</b>    | DeliveryMessage                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Type</b>          | LoadingOrder                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Scenario</b>      | A DeliveryMessage-WoodProducts is sent that specifies planned/shipped volumes.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>Outcome</b>       | Delivery is recorded as shipped in the Buyer's system                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Initiator</b>     | Supplier                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Receiver</b>      | Buyer                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Preconditions</b> | Goods have been planned to ship/shipped                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Step 1.</b>       | <p>Statuses sent within the e-Document:</p> <ul style="list-style-type: none"> <li>• DeliveryMessageStatusType = "Original"</li> <li>• Supplier sends a DeliveryMessageWood that corresponds to one PurchaseOrderInformation, PurchaseOrderLineItemNumber combination. PackageInformation can occur multiple times.</li> <li>• Identifier is used to distinguish the package</li> <li>• ItemCount is the count of the Number of Pieces in the Package</li> <li>• Quantity contains the Volume of the products or the number of packages</li> <li>• InformationalQuantity with QuantityType="Volume" specifies the Nominal volume of Product.</li> </ul> |

### Scenario D

|                   |                                                               |
|-------------------|---------------------------------------------------------------|
| <b>e-Document</b> | DeliveryMessageWood                                           |
| <b>Type</b>       | PackingSpecification                                          |
| <b>Scenario</b>   | A DeliveryMessage-WoodProducts is sent that details packages. |
| <b>Outcome</b>    | Delivery is recorded as shipped in the Buyer's system         |

## DeliveryMessageWood papiNet Standard - Version 2.31

|                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Initiator</b>     | Supplier                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Receiver</b>      | Buyer                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Preconditions</b> | Goods are ready for Delivery                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>XML File</b>      | The name of any sample file.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Trigger</b>       | What starts the process?                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Step 1.</b>       | <p>Supplier sends a DeliveryMessageWood that corresponds to one PurchaseOrderInformation, PurchaseOrderLineItemNumber combination. Each PackageInformation occurrence specifies the Boxes that contain the Reams that are sent and optionally may contain SheetItem information.</p> <ul style="list-style-type: none"> <li>• PackageInformation can occur multiple times.</li> <li>• Identifier is the Identifier used to distinguish the package ItemCount is the count of the number of pieces in the package</li> <li>• Quantity contains the Actual volume of the package</li> <li>• InformationalQuantity with QuantityType = "Volume" specifies the nominal volume of the package</li> </ul> <p>Statuses sent within the e-Document:</p> <ul style="list-style-type: none"> <li>• DeliveryMessageStatusType = "Original"</li> </ul> |

### Scenario E

|                      |                                                                   |
|----------------------|-------------------------------------------------------------------|
| <b>e-Document</b>    | DeliveryMessageWood                                               |
| <b>Type</b>          | DeliveryMessage                                                   |
| <b>Scenario</b>      | A DeliveryMessage is sent that specifies multiple DeliveryLeg(s). |
| <b>Outcome</b>       | Delivery is recorded as shipped in the Buyer's system             |
| <b>Initiator</b>     | Supplier                                                          |
| <b>Receiver</b>      | Buyer                                                             |
| <b>Preconditions</b> | Goods are ready for Delivery                                      |
| <b>XML File</b>      | The name of any sample file.                                      |
| <b>Trigger</b>       | What starts the process?                                          |



## DeliveryMessageWood papiNet Standard - Version 2.31

### Step 1.

Supplier sends a DeliveryMessageWood that has multiple DeliveryLeg(s) for the entire e-Document. A DeliveryLeg details the actual transportation origin and destination. It includes:

- DeliveryLegSequenceNumber which increments starting at 1
- DeliveryOrigin includes the LocationType which specifies "CustomerFacility", "Mill", "Port", "Terminal" or "Warehouse"
- DeliveryOrigin Date and Name are projected
- For each DeliveryLeg, optional Transportation can be specified.
- TransportModeCharacteristics includes the attribute TransportModeType (e.g. "Rail")
- TransportVehicleCharacteristics includes the attribute TransportVehicleType (e.g. "TruckTrailer")
- TransportUnitCharacteristics includes the attribute TransportUnitType (e.g. "TrailerID")
- TransportUnitCharacteristics includes the TransportUnitIdentifier (e.g. ID of the Trailer)
- TransportLoadingCharacteristics and TransportOtherInstructions further describe the Transportation
- DeliveryTransitTime optionally projects the Days, Hours, and Minutes between Origin and Destination
- DeliveryDestination includes the LocationType which specifies "CustomerFacility", "Mill", "Port", "Terminal" or "Warehouse"
- DeliveryDestination Date and Name are projected

Statuses sent within the e-Document:

- DeliveryMessageStatusType = "Original"